

BOROUGH OF GLEN ROCK

BERGEN COUNTY


NEW JERSEY




CONSTRUCTION DETAILS FOR CURBS, SIDEWALKS, AND DRIVEWAY APRONS IN RESIDENTIAL DISTRICTS

(Complete information is contained in Section 1-88-26 Revised General Ordinances)

PLAN

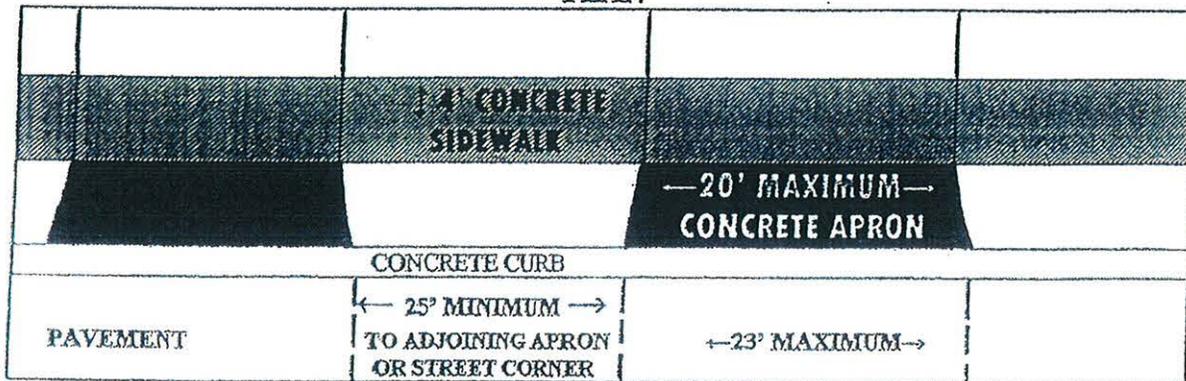

ELEVATION

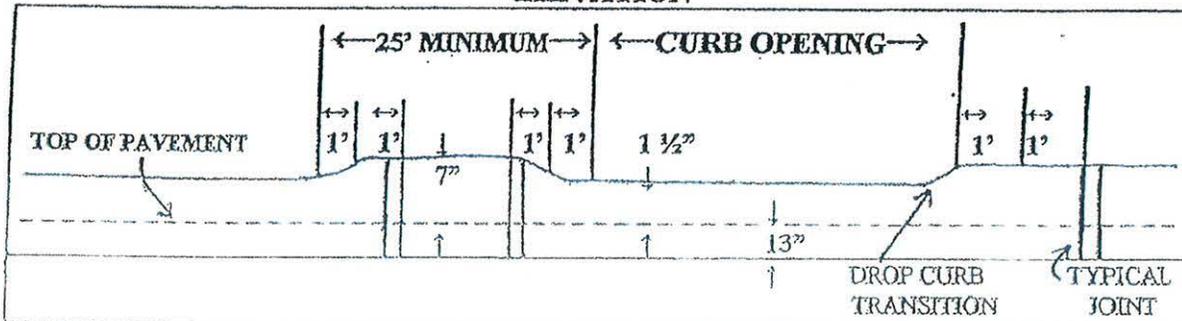

ALL SPECIFICATIONS MUST BE MET AS LISTED OR WORK WILL NOT BE APPROVED

CONCRETE: shall be a minimum of 3,500psi Class B Concrete, obtained from a LICENSED Ready-mix supplier. Between new and old concrete, 1/4" thick bituminous impregnated strip (expansion joint) must be placed.

CURBS: 9" wide at bottom, 7" wide at top, 20" in depth, with joints at intervals of not over 10'.

SIDEWALKS: 4" thick, except that in driveway areas the required thickness is 6". Slabs 4' wide and 5' long with 1/4" thick bituminous impregnated strip (expansion joint) every 10'.

DRIVEWAY APRONS: 6" thick and separated from sidewalk and curb by 1/4" thick bituminous impregnated strip (expansion joint).

NOTE: PERMITS ARE REQUIRED and are obtained at the Department of Public Works and all work will be inspected once for reset work and twice for new or replacement work (forms before concrete is poured and when work is completed).