

# BOROUGH OF GLEN ROCK

BERGEN COUNTY


NEW JERSEY




## CONSTRUCTION DETAILS FOR CURBS, SIDEWALKS, AND DRIVEWAY APRONS IN RESIDENTIAL DISTRICTS

(Complete information is contained in Section 1-88-26 Revised General Ordinances)

PLAN

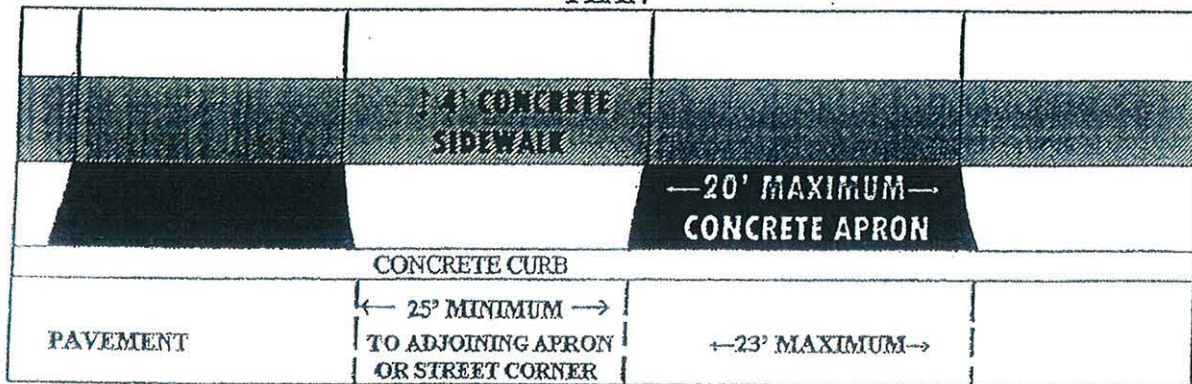

ELEVATION

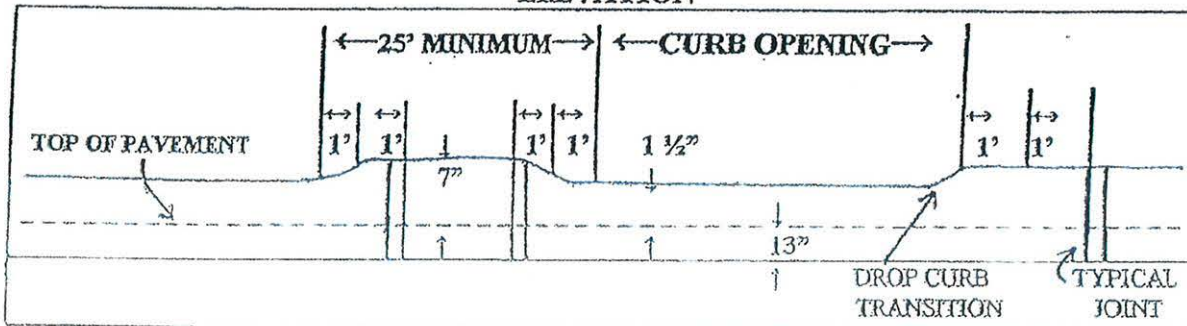

### ALL SPECIFICATIONS MUST BE MET AS LISTED OR WORK WILL NOT BE APPROVED

**CONCRETE:** shall be a minimum of 3,500psi Class B Concrete, obtained from a LICENSED Ready-mix supplier. Between new and old concrete, 1/4" thick bituminous impregnated strip (expansion joint) must be placed.

**CURBS:** 9" wide at bottom, 7" wide at top, 20" in depth, with joints at intervals of not over 10'.

**SIDEWALKS:** 4" thick, except that in driveway areas the required thickness is 6". Slabs 4' wide and 5' long with 1/4" thick bituminous impregnated strip (expansion joint) every 10'.

**DRIVEWAY APRONS:** 6" thick and separated from sidewalk and curb by 1/4" thick bituminous impregnated strip (expansion joint).

**NOTE:** PERMITS ARE REQUIRED and are obtained at the Department of Public Works and all work will be inspected once for reset work and twice for new or replacement work (forms before concrete is poured and when work is completed).

## Road Openings

Permits, associated fees, a bond, and insurance certification (see Ordinance section 188-13 for specific requirements) from the contractor performing the work is to be submitted for any residential or commercial excavation work or installation that requires the road to be opened. Traffic Control Plans may be needed if deemed necessary by the Director of the Department of Public Works or Glen Rock Police Department.

Examples of work type include, but are not limited to:

- Driveway apron or sidewalk with depressed curb
- New curbs, replacement curbs, curb modifications
- Utility work or drainage repairs or replacements
- Asphalt regrading or road repairs

New Jersey One Call (1-800-272-1000 or 811) must be contacted **before** you dig.

### **Costs and Required Paperwork**

| TYPE OF WORK BEING DONE | PERMIT COST    | ROAD OPENING PERMIT | <b>\$500.00 BOND</b> | CERTIFICATE OF INSURANCE |
|-------------------------|----------------|---------------------|----------------------|--------------------------|
| SIDEWALK RESET          | \$20.00 PERMIT | NOT REQUIRED        | NOT REQUIRED         | NOT REQUIRED             |
| SIDEWALK REPLACEMENT    | \$40.00 PERMIT | NOT REQUIRED        | NOT REQUIRED         | NOT REQUIRED             |
| DRIVEWAY APRON          | \$40.00 PERMIT | REQUIRED            | REQUIRED             | REQUIRED                 |
| CURBS                   | \$40.00 PERMIT | REQUIRED            | REQUIRED             | REQUIRED                 |
| ROAD OPENING            | \$10.00 PERMIT | REQUIRED            | REQUIRED             | REQUIRED                 |

### **INSPECTIONS**

Inspections are performed during the job and upon completion to ensure the work is in accordance with required specifications. When ready for inspection phone 201-670-3980 to schedule. Inspections will include visual evaluation that proper compaction of materials was maintained, all work related debris and discarded materials have been removed, and the work area is being left in usable and safe condition.

For any opening in the public roadway, the \$500.00 bond will be held for a period of one (1) year; After such time, a final inspection will be performed and if the integrity of the work is in satisfactory condition, the bond will be released.